



Coby Apron Standard Specifications

Framed Bases

Legs:

- Coby Apron legs are constructed of ASTM-A500 14ga square tubular steel legs
- Base placement for legs are set in 3/4" from edges of table top

Aprons:

- Aprons are C1008 cold rolled 12ga sheet formed and MIG welded to apron beams.
- The aprons are attached to the legs using mechanical fasteners.



Foot Rails:

- Foot rails are optional on table lengths up to 72" and are standard on tables over 72" long. Foot rails are formed and MIG welded C1008 cold rolled 12ga sheet with hidden mechanical fasteners
- Foot rails consist of two end-rail section bolted between the legs on each end, and a mid-rail section bolted in the center between the two end rails.



Finishes:

- Low VOC powder coat finishes; Bases are available in any Hi5 powder coating. Apron base components are interchangeable to create a variety of different custom sizes.


Up to 72" Long with 4 legs

- Can have
- No Foot Rail (CYA0)
- Centered Foot Rail (CYA1)
- Perimeter Foot Rail (CYA2)




84" to 108" Long with 4 legs

- Can have
- Centered Foot Rail (CYA1)
- Perimeter Foot Rail (CYA2)




120" - 192 with 6 legs

- Can have
- Centered Foot Rail (CYA1)
- Perimeter Foot Rail (CYA2)



204" - 264" with 8 legs

- Can have
- Centered Foot Rail (CYA1)
- Perimeter Foot Rail (CYA2)



TOP WILL DRAW-BOLT TOGETHER





Coby Apron Standard Specifications

Table Tops

Substrate Material:

- M3 industrial grade 47 lb. density particle board.
- 100% pre-consumer recycled wood fiber particle board certified by Scientific Certification Systems (SCS). Particleboard is at least 90% wood fiber by weight.
- Forest Stewardship Council (FSC); mixed credit available (optional).
- Meets California Air Resources Board (CARB) Regulation 93120.2, Phase 1 emissions limits
- Environmentally Preferable Product (EPP) Certified by the Composite Panel Association
- No Added Urea-Formaldehyde (NAUF) Particleboard (Option)

Surface Material: High Pressure Laminate (HPL):

- Wilsonart, Formica, Nevamar and Pionite laminates are GREENGUARD Indoor Air Quality Certified® and GREENGUARD for Children and Schools CertifiedSM.

Adhesive:

- Water based adhesive
- Low VOC emissions
- Does not contain urea-formaldehyde
- Laminate adhesive is GREENGUARD Indoor Air Quality Certified®


Edge Material:

- High Impact PVC Edge: 3mm Flex PVC edges in a variety colors and textures


Backer Material:

- Balance phenolic backer sheet permanently bonded to the particleboard core


SEATED HEIGHT

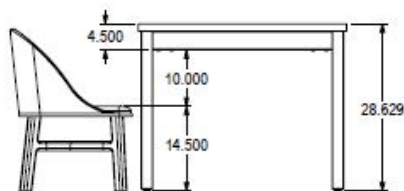

CAFE HEIGHT

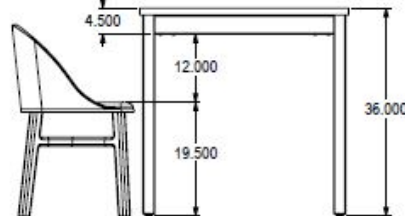

BAR HEIGHT

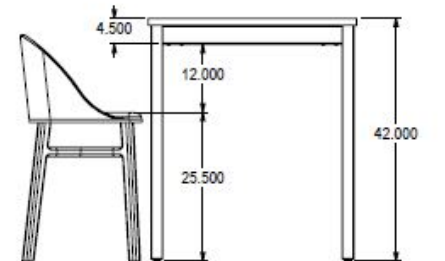

NOTE: APRON AND TABLE TOP COMBINED ARE 4.5" HIGH

29" SEATED HEIGHT TABLE HAS 24.5" OF CLEARANCE

36" SEATED HEIGHT TABLE HAS 31.5" OF CLEARANCE

42" SEATED HEIGHT TABLE HAS 37.5" OF CLEARANCE

IF BIFMA RECOMMENDED SPACE IS DESIRED, ORDER CUSTOM HEIGHT OF 32.5 FOR SEATED