

# OPTIONS

Effective 03/01/2023



### Modesty Panel Specification

- 9" high x 18GA steel laser cut steel panels
- Free swinging
- Modesty panels are not available on folding tables
- Panels are field Installed



Code: M1



Code: M2



Code: M3



Code: M4



Code: M5



Code: M6

### Grommet

3" round plastic grommet is provided with table tops that are cut at factory for correct hole size. Field installed.

Available in Black or Silver

Model Code: G

### Industrial locking casters

Recommended for: Coby Apron, Coby Post, Coby Square, Lincoln and Union 2.0 tables.

Designed for both hard & soft floors to move table between areas without damaging the floors. Grey polyurethane wheel, 4" diameter with 1/2"-13 x 1.5" threaded stem with a height of 5" and has ball bearings. Weight capacity is 300 lbs. per caster.

Model Code: CSI

### Swivel cup holder

Secured with screws, this cup holder is 8" x 5" 14GA steel, has 110° of swivel and fits two sizes of cups: standard 2.75" and larger 3.5". Available in black only

Model Code: CUP

### Tablet holder

Secured with screws, this tablet holder is 6" x 8" 16GA steel, has a 2" flange that screws under the top Available in Black, Silver or White

Model Code: TAB

### Table gangers

Simply twist and lock in place. Not available on knife profile edges.

Model Code: TG

### Leveling table gangers

3" x 6" 11GA steel plates. Simply loosen the knobs, slide plate over, and tighten knobs. Tops are joined and leveled. Inserts are factory installed, plate and knobs are field installed. Not available on knife edge profiles.

Model Code: QR

### Bag Hook

Black 14GA bent steel hook holds up to 100 lbs. and can be placed anywhere under your table. Field installed.

Model Code: HOOK

### Floor anchored bracket

Steel bracket provides way to fix the table to the floor. Screws to drill into the floor are not provided. Recommended on 18" wide tables that are taller than 30" high.

Model Code: FA

### Apron to accept power

Recommended for: Union 2.0 Tables

3.25" high x 12GA steel apron beam to house power.

(Cove power units are sold separately)

Model Code: APU



## Wire Management

### Cable Base with holes

Recommended for: Coby Apron, Coby Post, Gateway, and Supreme

1.5" x 2.5" holes cut in the top and bottom of the base column to feed wire(s) in and out of base.

Model Code: WB

### Magnetic wire manager

Recommended for: Coby Square, Empire, NiM, Jewel, Lincoln (square or rectangular bases only)

1" deep X 2" wide x 17.75" tall; 22GA steel with open slot to accommodate any cable. It weighs 1 lbs.

Available in Black, White or Silver.

Model Code: WMAG

### Snap on vertical wire manager

Recommended for: Gateway "T2" bases and Gateway beam nesting tables

Easy steel Snap-on cover has the capacity for many cables. Standard 17 3/4" length.

Available in Black, Silver or White.



### Loop Clips

Four clips are provided with every power box to secure cables under the Tabletop. Sets of 4 may also be purchased.

Model Code WLOOP

### Steel Horizontal Cable Trough:

12" x 34" long x 6" high, black 18GA steel trough with side access holes.

Available in Black and field installed.

Model Code: WT

### Power box pass through base

Recommended for: Island and Supreme "X" based tables

The base includes a formed steel box under the surface to house the power unit. The column is hollow and the bottom of the base includes an exit hole for the cables.

Model Code: WPP



# POWER

Effective 03/01/2023



## Power only sold with Hi5 products

### AV PLATE CHOICES



Plate#0

Add \$10 to power unit List Price



Plate#1

Add \$180 to power unit List Price. Includes: (2) RJ-45 Punch Down Siemen Cat 6 Black



Plate#21

Add \$380 to power unit List Price. Includes: (1) HDMI with 36 patch cord aT2ached (2) RJ-45 Punch Down Siemen Cat 6 Black



Plate#24

Add \$220 to power unit List Price. Includes: (1) HDMI with 36 patch cord aT2ached



Plate#25

Add \$420 to power unit List Price. Includes: (2) HDMI with 36 patch cord aT2ached



Plate#48

Add \$300 to power unit List Price. Includes: (1) HDMI with 36 patch cord aT2ached (1) RJ-45 Punch Down Siemen Cat 6 Black

	Under Top Edge Mount	Apron Mount	Top Flush Mount	Top Raised Mount	Linking Available	Number of Outlets per Box	Number of USB-A per box	Number of USB-C per box	AV Plates to add HDMI and/or Internet Jacks
Zest	•				•	2			
Chirp	•					2	1 or 2	1 or 2	•
TinyBrite	•				•	1 or 2	1	1	
Slick	•				•	2	2		
Cove		•	•		•	2 or 4	1 or 2	1	•
Pearl			•			1 or 2	2		
Charm			•			2	2		•
Wink			•		•	2 or 3	1	1	
Jazz			•		•	4	2		•
Volt			•		•	6	2		•
Halo				•	•	2 or 3	1	1	
Zing				•	•	2	2		
Spunk				•	•	1 or 2	1	1	
Glow				•	•	1	1	1	
Flare				•	•	4 or 6	2	2	



**Power only sold with Hi5 products**



**CHARM**

	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	2			1	PCM2S- <b>1</b> - <b>2</b> - <b>3</b>	500
Non-Linking	2	2		1	PCM2USBS- <b>1</b> - <b>2</b> - <b>3</b>	700
Hardwired	2			1	PCM2H- <b>1</b> - <b>2</b> - <b>3</b>	560
Hardwired	2	2		1	PCM2USBH- <b>1</b> - <b>2</b> - <b>3</b>	770

**To Order, Specify:**

**1 List Model Code with the color code**

- B Black
- S Silver
- W White

**2 List the AV Plate code, if applicable:**

- 0 Blank Plate to Cover Hole
- 1 2 Data Jacks
- 21 2 Data Jacks and 1 HDMI
- 24 1 HDMI
- 25 2 HDMI
- 48 1 Data Jacks and 1 HDMI

**3 List the Location Code of your boxes**



**Hardware Tip**

- When specified with hardwired infeed, a licensed electrician is required to complete hardwire connections to building's power source.

**FEATURES:**

- 15A/120V AC Receptacles
- 2.1A/5V Dual USB Charging Ports
- Convenience Outlet
- Cord Pass throughs for Cord Management
- Standard Cord Lengths: 72"
- ETL Listed for US and Canada

## Power only sold with Hi5 products



### CHIRP

	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	2	-	-	-	PCH1.- <b>1</b> -72- <b>2</b> - <b>3</b>	350
Non-Linking	2	2	-	-	PCH2.- <b>1</b> -72- <b>2</b> - <b>3</b>	550
Non-Linking	2	1	1	-	PCH3.- <b>1</b> -72- <b>2</b> - <b>3</b>	630
Non-Linking	2	1	1	1	PCH4.- <b>1</b> -72- <b>2</b> - <b>3</b>	630
Non-Linking	2	-	2	-	PCH5.- <b>1</b> -72- <b>2</b> - <b>3</b>	650

### 60-WAT2 UNITS

	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	2	1	1	-	PCH6.- <b>1</b> -72- <b>2</b> - <b>3</b>	770
Non-Linking	2	1	1	1	PCH7.- <b>1</b> -72- <b>2</b> - <b>3</b>	770

### To Order, Specify:


**1 List Model Code with the color code**

- B Black
- S Silver
- W White

**2 List the AV Plate code, if applicable:**

- 0 Blank Plate to Cover Hole
- 1 2 Data Jacks
- 21 2 Data Jacks and 1 HDMI
- 24 1 HDMI
- 25 2 HDMI
- 48 1 Data Jacks and 1 HDMI

**3 List the Location Code of your boxes**

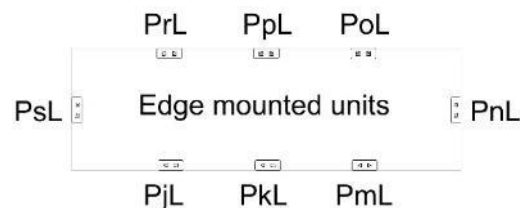

### FEATURES:

- 15A/120V AC Tamper-Resistant Receptacles
- 5A/5V Shared; USB & USB-C® Charging Ports
- Standard Cord Length: 72"
- ETL Listed for US and Canada

### 60 WAT2 UNITS FEATURES:

- 15A/120V AC Tamper-Resistant Receptacles
- 2.1A/5V USB Charging Port
- 60 Wat2 USB-C® Power-Delivery Enabled (USB-PD) Charging Port
- Standard Cord Length: 72" NEMA 5-15 Straight Plug
- ETL Listed for US and Canada



**Power only sold with Hi5 products**



**COVE**

	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	2	-	-	-	PC. ①-108-②-③	400
Non-Linking	2	2	-	-	PCU. ①-108-②-③	600
Non-Linking	2	2	-	1	PCUA. ①-108-②-③	600
Non-Linking	4	2	-	1	PC4UA. ①-108-②-③	770
Non-Linking	2	2	-	-	PCU22. ①-108-②-③	810

**ROUND UNITS**

Non-Linking	2	-	-	-	PCR2. ①-108-②-③	400
Non-Linking	2	2	-	-	PCR2U. ①-108-②-③	600

**60-WAT2 UNITS**

	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	2	1	1	-	PC61. ①-108-②-③	880
Non-Linking	2	1	1	1	PC62. ①-108-②-③	880
Non-Linking	4	1	1	-	PC63. ①-108-②-③	1,210
Non-Linking	4	1	1	1	PC64. ①-108-②-③	1,210

**To Order, Specify:**

**① List Model Code with the color code**

- B Black
- S Silver
- W White


**② List the AV Plate code, if applicable:**

- 0 Blank Plate to Cover Hole
- 1 2 Data Jacks
- 21 2 Data Jacks and 1 HDMI
- 24 1 HDMI
- 25 2 HDMI
- 48 1 Data Jacks and 1 HDMI

**③ List the Location Code of your boxes**



*Use edge mounted location s to mount into Coby Apron Tables*

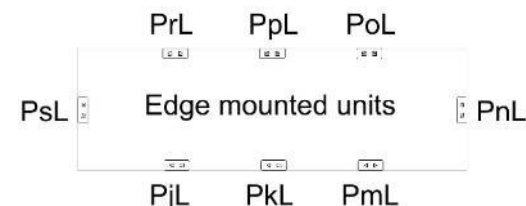

**FEATURES:**

- 15A/120V AC Spill-Resistant Receptacles
- 2.1A/5V Shared; Dual USB Charging Ports
- Convenience Outlets on PCU22 Model
- Standard Cord Length: 108"
- ETL Listed for US and Canada

**60 WAT2 UNITS FEATURES:**

- 15A/120V AC Spill-Resistant Receptacles
- 2.1A/5V USB Charging Port
- 60 Wat2 USB-C® Power-Delivery Enabled (USB-PD) Charging Port
- Standard Cord Length: 108" with 90-Degree Plug
- ETL Listed for US and Canada

## Power only sold with Hi5 products



### COVE (link power boxes together)

	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Linking	2	-	-	-	PCL.- ①-②-③-④	540
Linking	2	2	-	-	PCUL. ①-②-③-④	740
Linking	2	2	-	1	PCUAL. ①-②-③-④	740
Linking	4	2	-	1	PC4UAL. ①-②-③-④	1,040

### To Order, Specify:

① List Model Code with the color code

- B Black
- S Silver
- W White


② List the AV Plate code, if applicable:

- 0 Blank Plate to Cover Hole
- 1 2 Data Jacks
- 21 2 Data Jacks and 1 HDMI
- 24 1 HDMI
- 25 2 HDMI
- 48 1 Data Jacks and 1 HDMI

③ List the Location Code of your boxes



Use edge mounted location s to mount into  
Coby Apron Tables

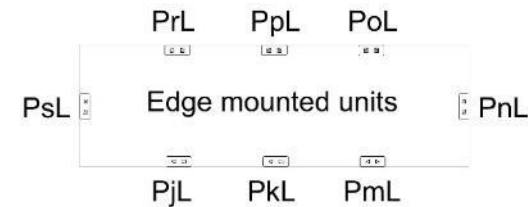

④ List the Qty and Length of Starter Cables



- Code: PSTS72F  
72" Starter Cable, add \$270 list per cable
- Code: PSTS96F  
96" Starter Cable, add \$390 list per cable
- Code: PSTS120F  
120" Starter Cable, add \$430 list per cable

### Linking Tip

- No more than 8 units can link together
- Starter Infeed cables have a 20 amp plug end which requires a 20-amp wall receptacle. A plug adapter is required if using a standard 15-amp receptacle. The adapter is included.

### LINKING UNIT'S FEATURES:

- 15A/120V AC Spill-Resistant Receptacles
- 2.1A/5V Shared; Dual USB Charging Ports
- ETL Listed for US and Canada



**Power only sold with Hi5 products**



**FLARE**


	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	4	2	2	-	PF. ①-32-②-③	1,740
Non-Linking	6	2	2	-	PF2. ①-32-②-③	1,880
Linking	4	2	2	-	PFL. ①-32-②-③	1,870
Linking	6	2	2	-	PF2L. ①-32-②-③	2,000

**To Order, Specify:**

**① List Model Code with the color code**

B Black  
 S Stainless

**② List the Location Code of your boxes**



**③ List the Qty and Length of Starter Cables**

**Code: PLUG72**  
 72" Starter Cable, add \$90 list per cable  
**Code: PLUG108**  
 108" Starter Cable, add \$150 list per cable

**Tip**

- Every non-linking unit needs a starter cable.
- Linking units need one starter cable per run of tables
- No more than 6 units can link together

**FEATURES:**

- Brushed stainless steel frame
- 4 Power Size: 6.1" x 8.6" long x .87" raised off the Tabletop
- 6 Power Size: 6.1" x 11.8" long x .87" raised off the Tabletop
- Secured with 4 x screw clamps, as standard, for surfaces 0.40"-1.18"
- Reversible Type A USB
- Blue LED - 5V Standard Fast Charge
- Power and cord: 32" pigtail to a male GST connector to be used with PLUG LINKING SYSTEM
- Certifications: cETLus Listed - UL962A/CSA22.2

## Power only sold with Hi5 products



### GLOW



	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	1	1	1		PG. ①-32-②-③	540
Non-Linking	1	1	1		PG. ①-32-②-③	540
Linking	1	1	1		PGL. ①-32-②-③	660
Linking	1	1	1		PGL. ①-32-②-③	660

### To Order, Specify:

- List Model Code with the color code  
 WSL White with Silver Ring  
 BSL Black with Silver Ring

- List the Location Code of your boxes



- List the Qty and Length of Starter Cables

Code: **PLUG72**  
 72" Starter Cable, add \$90 list per cable  
 Code: **PLUG108**  
 108" Starter Cable, add \$150 list per cable

### Tip

- Every non-linking unit needs a starter cable.
- Linking units need one starter cable per run of tables
- No more than 6 units can link together

### FEATURES:

- Size: 4.25" diameter x .61" raised off the Tabletop
- USB Charging: Twin USB Fast Charger maximum combined output of 25W.
- Reversible Type A USB
- Blue LED - 5V Standard Fast Charge
- A single cable pass-thru feature is built - up to .35" knock-out in fascia
- Certifications: cETLus Listed - UL962A/CSA22.2

**Power only sold with Hi5 products**



**HALO**


	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	3	-	-		PH1. ①-12-②-③	410
Non-Linking	2	1	1		PH2. ①-12-②-③	660
Linking	3	-	-		PH1L. ①-12-②-③	530
Linking	2	1	1		PH2L. ①-12-②-③	780

**To Order, Specify:**

**① List Model Code with the color code**

B Black  
 W White

**② List the Location Code of your boxes**



**③ List the Qty and Length of Starter Cables**

**Code: PLUG72**  
 72" Starter Cable, add \$90 list per cable  
**Code: PLUG108**  
 108" Starter Cable, add \$150 list per cable

**Tip**

- Every non-linking unit needs a starter cable.
- Linking units need one starter cable per run of tables
- No more than 6 units can link together

**FEATURES:**

- Size: 5.5" diameter x 2.85" raised off the Tabletop
- Secured to the table
- USB Charging: Twin USB Fast Charger maximum combined output of 25W.
- Reversible Type A USB
- Blue LED - 5V Standard Fast Charge
- Power and cord: 12" pigtail to a male GST connector to be used with PLUG LINKING SYSTEM
- Certifications: cETLus Listed – UL962A/CSA22.2

## Power only sold with Hi5 products



### JAZZ

	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	4	2	-	1	PJ. ①-108-②-③	1,510
Linking	4	2	-	1	PJL. ①-②-③-④	2,150

### To Order, Specify:

**① List Model Code with the color code**

- B Black
- S Silver
- W White

**② List the AV Plate code, if applicable:**

- 0 Blank Plate to Cover Hole
- 1 2 Data Jacks
- 21 2 Data Jacks and 1 HDMI
- 24 1 HDMI
- 25 2 HDMI
- 48 1 Data Jacks and 1 HDMI

**③ List the Location Code of your boxes**



**④ List the Qty and Length of Starter Cables**

- Code: PSTS72F**  
72" Starter Cable, add \$270 list per cable
- Code: PSTS96F**  
96" Starter Cable, add \$390 list per cable
- Code: PSTS120F**  
120" Starter Cable, add \$430 list per cable

#### Non-Linking Tip


- Comes standard as a single-circuit electrical system with 108" long soft-wired cord.

#### Linking Tip

- If ordering linking units, a starter infeed cable is required and ordered separately.
- Starter Infeed cables have a 20 amp plug end which requires a 20-amp wall receptacle. A plug adapter is required if using a standard 15-amp receptacle. The adapter is included.

#### FEATURES:

- Size: 6.25" x 16.1"
- 15A/120V AC Spill-Resistant Receptacles
- 2A/5V Shared; Dual USB Ports
- • Cord Pass through for Cord Management
- ETL Listed for US and Canada



20 amp Receptacle

15 amp Receptacle

**Power only sold with Hi5 products**



**PEARL**


	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	1	-	-		PP1. ①-72-②	90
Non-Linking	-	2	-		PP2. ①-72-②	260
Non-Linking	2	2	-		PP3. ①-72-②	300

**To Order, Specify:**

**① List Model Code with the color code**

- B Black
- S Silver
- W White

**② List the Location Code of your boxes**



**FEATURES:**

- 15A, 120VAC Tamper Resistant Receptacles
- 2.1A/10.5W USB Charging Ports
- 72" Standard Cord with NEMA 5-15 Straight Plug
- 3" Dimensions: 3.36" x 3.21"
- 2" Dimensions (USB & Power Only): 2.62" x 3.51"
- ETL Listed for US and Canada

## Power only sold with Hi5 products



### SLICK


	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	2	2	-	-	PSL1. ①-120-②	450
Linking	2	2	-	-	PSL1L. ①-12-②-③	560

### To Order, Specify:

#### ① List Model Code with the color code

- B Black
- S Silver
- W White

#### ② List the Location Code of your boxes

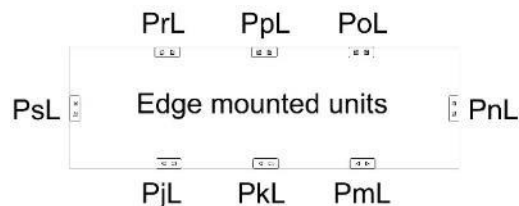

#### ③ List the Qty and Length of Starter Cables

- Code: PER-72  
72" Starter Cable, \$650 list per cable
- Code: PER-108  
108" Starter Cable, \$660 list per cable
- Code: PER-120  
120" Starter Cable, \$670 list per cable
- Code: PER-132  
132" Starter Cable, \$680 list per cable
- Code: PER-144  
144" Starter Cable, \$690 list per cable
- Code: PER-168  
168" Starter Cable, \$710 list per cable
- Code: PER-180  
180" Starter Cable, \$730 list per cable
- Code: PER-204  
204" Starter Cable, \$770 list per cable

#### Non-Linking Tip

- Comes standard with a 120" soft-wired cord.

#### Linking Tip

- If ordering linking units, a starter infeed cable is required and ordered separately. If ordering multiple linking units, jumpers come standard, and the lengths are determined by Hi5.

#### FEATURES:

- Size: 2.3" x 6" long x 1.81 high
- 2 - 15A, 120V AC Power Outlets
- 2 - 2.1A/10.5W USB Charging Ports
- UL 962A and UL 111 Listed
- UL 1310 Recognized
- Meets UL Spill Requirements
- Class 2, FCC Part 15 A Approved
- Meets USB.org BaT2ery Charging 1.2 Specifications



**Power only sold with Hi5 products**



**SPUNK**

	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	2	-	-	-	PSP1.S-32- <b>1</b>	510
Non-Linking	1	1	1	-	PSP2.S-32- <b>1</b>	760
Linking	2	-	-	-	PSP1L.S-32- <b>1-2</b>	630
Linking	1	1	1	-	PSP2L.S-32- <b>1-2</b>	880

**To Order, Specify:**

**1 List the Location Code of your boxes**



**2 List the Qty and Length of Starter Cables**

- Code: PLUG72**  
72" Starter Cable, add \$90 list per cable
- Code: PLUG108**  
108" Starter Cable, add \$150 list per cable

**Tip**

- Every non-linking unit needs a starter cable.
- Linking units need one starter cable per run of tables
- No more than 6 units can link together

**FEATURES:**

- Construction: Brushed stainless steel
- USB Charging: Twin USB Fast Charger maximum combined output of 25W.
- Reversible Type A USB
- Blue LED - 5V Standard Fast Charge
- Patented Replaceable Cartridge
- Power and cord: 32" pigtail to a male GST connector to be used with PLUG LINKING SYSTEM
- Certifications: cETLus Listed – UL962A/CSA22.2

## Power only sold with Hi5 products



### TINYBRITE


	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	2	-	-	-	PT1. ①-32-②	280
Non-Linking	1	1	1	-	PT2. ①-32-②	530
Linking	2	-	-	-	PT1L. ①-32-②-③	400
Linking	1	1	1	-	PT2L. ①-32-②-③	650

### To Order, Specify:

① List Model Code with the color code

B Black  
 W White

② List the Location Code of your boxes

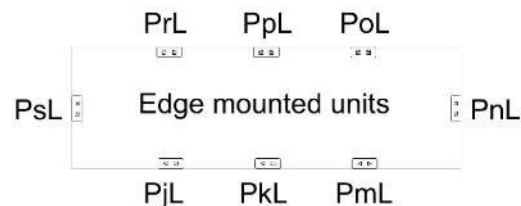

③ List the Qty and Length of Starter Cables

Code: PLUG72  
 72" Starter Cable, add \$90 list per cable  
 Code: PLUG108  
 108" Starter Cable, add \$150 list per cable

### Tip

- Every non-linking unit needs a starter cable.
- Linking units need one starter cable per run of tables
- No more than 6 units can link together

### FEATURES:

- Construction: polycarbonate & metal
- USB Charging: Twin USB Fast Charger maximum combined output of 25W.
- Reversible Type A USB
- Blue LED - 5V Standard Fast Charge
- Patented Replaceable Cartridge
- Power and cord: 12" pigtail to a male GST connector to be used with PLUG LINKING SYSTEM
- Certifications: cETLus Listed - UL962A/CSA22.2

**Power only sold with Hi5 products**



**VOLT**

	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Linking	6	2	-	1	PV. ①-②-③-④	3,340

**To Order, Specify:**

**① List Model Code with the color code**

- B Black
- S Silver
- W White

**② List the AV Plate code, if applicable:**

- 0 Blank Plate to Cover Hole
- 1 2 Data Jacks
- 21 2 Data Jacks and 1 HDMI
- 24 1 HDMI
- 25 2 HDMI
- 48 1 Data Jacks and 1 HDMI

**③ List the Location Code of your boxes**



**④ List the Qty and Length of Starter Cables**

- Code: PSTS72F**  
72" Starter Cable, add \$270 list per cable
- Code: PSTS96F**  
96" Starter Cable, add \$390 list per cable
- Code: PSTS120F**  
120" Starter Cable, add \$430 list per cable

**Non-Linking Tip**


- Comes standard as a single-circuit electrical system with 108" long soft-wired cord.

**Linking Tip**

- If ordering linking units, a starter infeed cable is required and ordered separately.
- Starter Infeed cables have a 20 amp plug end which requires a 20-amp wall receptacle. A plug adapter is required if using a standard 15-amp receptacle. The adapter is included.

**FEATURES:**

- 11.2" x 15" x 5.29 high Outer Pan included
- 20A/120V AC Receptacles
- 2.1A/5V Shared; Dual USB Charging Ports
- Circuit 1 and 2 Options - Link Up-to 6 Units across 2 Circuits
- Power Inserts - UL Listed for US and Canada



## Power only sold with Hi5 products



### WINK

	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	3	-	-	-	PW1. ①-32-②-③	480
Non-Linking	2	1	1	-	PW2. ①-32-②-③	720
Linking	3	-	-	-	PW1L. ①-32-②-③	600
Linking	2	1	1	-	PW2L. ①-32-②-③	850

### To Order, Specify:

① List Model Code with the color code

- B Black
- S Stainless Steel
- W White

② List the Location Code of your boxes



③ List the Qty and Length of Starter Cables

- Code: **PLUG72**  
72" Starter Cable, add \$90 list per cable
- Code: **PLUG108**  
108" Starter Cable, add \$150 list per cable

#### Tip

- Every non-linking unit needs a starter cable.
- Linking units need one starter cable per run of tables
- No more than 6 units can link together

#### FEATURES:

- Size: 5.37 – 5.9" diameter
- Secured to table top
- USB Charging: Twin USB Fast Charger maximum combined output of 25W.
- Reversible Type A USB
- Blue LED - 5V Standard Fast Charge
- Patented Replaceable Cartridge
- Power and cord: 32" pigtail to a male GST connector to be used with PLUG LINKING SYSTEM
- Certifications: cETLus Listed – UL962A/CSA22.2

**Power only sold with Hi5 products**



**ZEST**


	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	2	-	-	-	PZE1. ①-108-②	200
Linking	2	-	-	-	PZE1L. ①-12-②-③	360

**To Order, Specify:**

**① List Model Code with the color code**

B Black  
 W White

**② List the Location Code of your boxes**

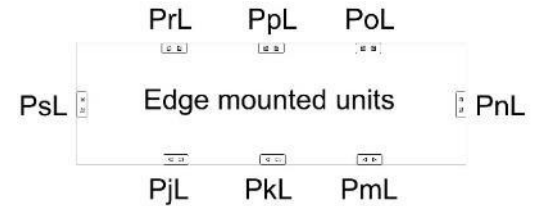

**③ List the Qty and Length of Starter Cables**

- Code: PER-72  
72" Starter Cable, \$650 list per cable
- Code: PER-108  
108" Starter Cable, \$660 list per cable
- Code: PER-120  
120" Starter Cable, \$670 list per cable
- Code: PER-132  
132" Starter Cable, \$680 list per cable
- Code: PER-144  
144" Starter Cable, \$690 list per cable
- Code: PER-168  
168" Starter Cable, \$710 list per cable
- Code: PER-180  
180" Starter Cable, \$730 list per cable
- Code: PER-204  
204" Starter Cable, \$770 list per cable

**Non-Linking Tip**

- Comes standard with a 108" soft-wired cord.

**Linking Tip**

- If ordering linking units, a starter infeed cable is required and ordered separately. If ordering multiple linking units, jumpers come standard, and the lengths are determined by Hi5.

**FEATURES:**

- Size: 3.70" x 2.30" x 1.80"
- 2- 15A, 120V AC Power Outlets
- UL 962A Listed
- UL 1363 Recognized
- Meets UL Spill Requirements
- Class 2, FCC Part A Approved

## Power only sold with Hi5 products



### ZING

	# OF OUTLETS	# OF USB-A	# OF USB-C	# OF AV PLATES	MODEL CODE	LIST PRICE
Non-Linking	2	2	-	-	PZ1. ①-120-②	590
Linking	2	2	-	-	PZ1L. ①-12-②-③	810

### To Order, Specify:

#### ① List Model Code with the color code

- B Black
- S Silver
- W White

#### ② List the Location Code of your boxes



#### ③ List the Qty and Length of Starter Cables

- Code: PER-72  
72" Starter Cable, \$650 list per cable
- Code: PER-108  
108" Starter Cable, \$660 list per cable
- Code: PER-120  
120" Starter Cable, \$670 list per cable
- Code: PER-132  
132" Starter Cable, \$680 list per cable
- Code: PER-144  
144" Starter Cable, \$690 list per cable
- Code: PER-168  
168" Starter Cable, \$710 list per cable
- Code: PER-180  
180" Starter Cable, \$730 list per cable
- Code: PER-204  
204" Starter Cable, \$770 list per cable

#### Non-Linking Tip

- Comes standard with a 120" soft-wired cord.

#### Linking Tip

- If ordering linking units, a starter infeed cable is required and ordered separately. If ordering multiple linking units, jumpers come standard, and the lengths are determined by Hi5.

#### FEATURES:

- Size: 5" x 7" x 1.57" high pop-up
- 2- 15A, 120V AC Power Outlets
- 2- 2.1A/10.5W USB Charging Ports
- Gas Strut Open/Close Mechanism
- UL 962A and UL 111 Listed
- UL 1310 Recognized
- Meets UL Spill Requirements
- Class 2, FCC Part 15 A Approved
- Meets USB.org BaT2ery Charging 1.2 Specifications